


Saturable plasmonic metasurfaces for laser mode locking

May 26 2020

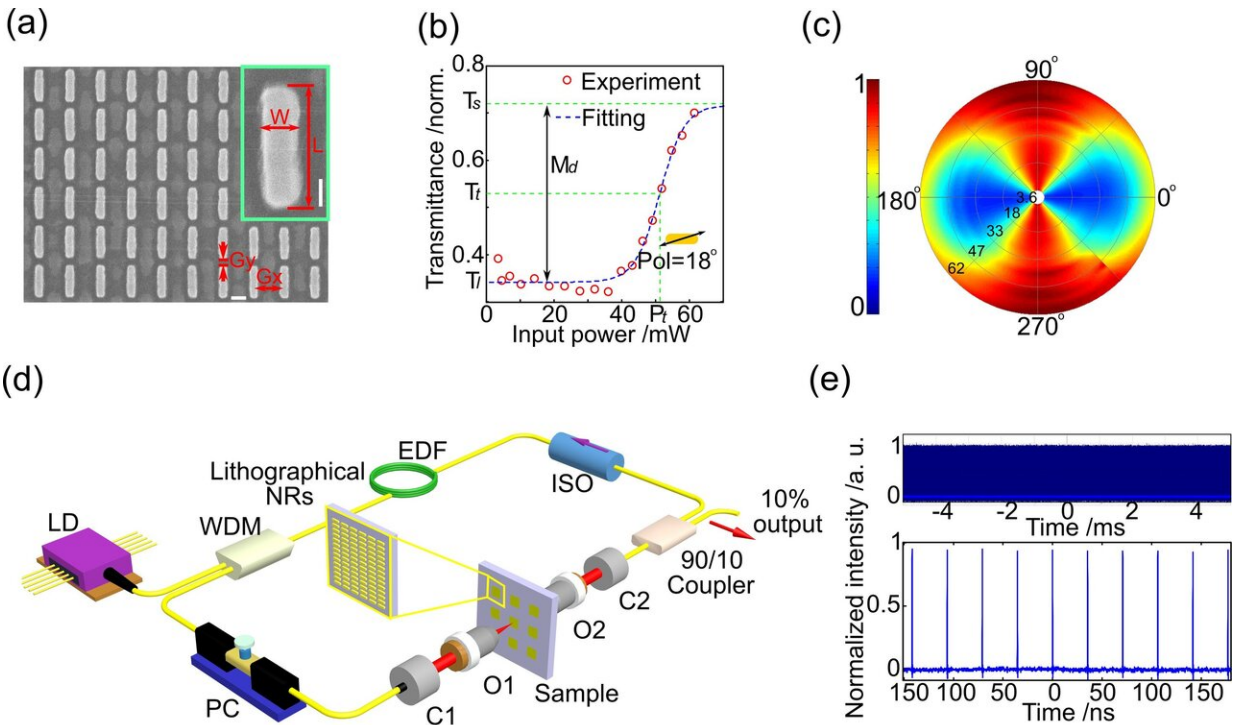

(a) SEM image of a NR array with a 50 nm gap in the long axis direction (G_y) and a 300 nm gap in the short axis direction (G_x). The horizontal scale bar represents 200 nm. The inset shows a single NR from this array, which has a length (L) of 445 nm and a width (W) of 120 nm. The vertical scale bar represents 100 nm. (b) The experimental transmission (red circles) of the NR array as a function of the input power with the excitation polarization of 18° with respect to the long axis of the NR. The modulation depth M_d and typical transmission T_t are defined from the corresponding fittings (blue curve). The transmission is normalized to the value of the nearby blank glass slide. (c) Experimental excitation power and polarization dependent nonlinear

transmission of a NRs array. (d) The scheme of home-built ultrafast fiber laser which integrates lithographical NRs as saturable absorber, where LD represents laser diode, WDM wavelength-division multiplexing, EDF erbium-doped fiber, ISO optical isolator, PC polarization controller, C1,2 collimators and O1,2 objectives. (e) Pulse train shown on the oscilloscope in short (300 ns, lower panel) and long (10 ms, upper panel) time ranges. Credit: by Jiyong Wang, Aurelien Coillet, Olivier Demichel, Zhiqiang Wang, Davi Rego, Alexandre Bouhelier, Philippe Grelu and Benoit Cluzel

Plasmonic metasurfaces are artificial 2-D sheets of plasmonic unit cells repeated in a subwavelength array, which give rise to unexpected wave properties that do not exist in nature. In the linear regime, their applications in wavefront manipulation for lensing, holography or polarization control have been intensively studied. However, applications in the nonlinear regime have been rarely reported. Considering the growing demand for saturable absorbers—a special class of nonlinear devices in which transparency (or absorption) depends on light intensity—for ultrafast lasers and neuromorphic circuits, scientists from France, China and Brazil have developed plasmonic metasurfaces providing a remarkably efficient saturable absorption which can be tuned with the polarization of light.

In a new paper published in *Light: Science & Applications*, scientists from Laboratoire Interdisciplinaire Carnot de Bourgogne, at Université Bourgogne— Franche-Comté, France; from Key Laboratory of 3-D Micro/Nano Fabrication and Characterization of Zhejiang Province, School of Engineering, Westlake University, China; and co-workers from Department of Electrotechnology, Federal Institute of Bahia, Brazil, employed planar nanotechnologies to fabricate 2-D [plasmonic](#) metasurfaces with the precise size, gap and orientation and thus well-controlled plasmonic mode that chemically synthesized counterparts barely handle. The nonlinear saturable absorption under intense [laser](#)

pumping was systematically investigated by altering the excitation power, the polarization and the geometrical parameters of the plasmonic metasurfaces. The link between the polarimetric saturable absorption and the plasmonic landscape of the metasurfaces has been quantified. More interestingly, the researchers implemented the saturable metasurfaces into a fiber laser cavity architecture and achieved a stable self-starting ultrashort laser pulse generation.

They investigated different plasmonic landscapes such as nanorods, nanocrosses and nanorings as saturable absorbers to generate ultrafast laser pulses. Remarkably, they measured the modulation depth of the saturable absorption of such plasmonic metasurfaces as high as 60%. "Such high modulation depths are uncommon, especially for thin metasurfaces: a comparison between 2-D-saturable absorbers shows that the maximum modulation depth reported is less than 11%, and a similar study with colloidal gold nanorods reports a modulation depth of only around 5%. A typical SESAM (semiconductor saturable absorber mirror) can feature a modulation depth exceeding 30%, but from a much thicker device," Prof. Grellu said.

"The key point is to find the quantitative relationship between the nonlinear absorption and the specific plasmonic modes and this might only be achieved by using planar nanotechnologies to fabricate the plasmonic metasurfaces, e. g. [electron-beam lithography](#), rather than simply spin-coating the colloidal nanoparticles onto the fiber or dipping the fiber into the nanoparticle solutions," Dr. Cluzel said.

By integrating the plasmonic metasurfaces within a free-space section of the fiber laser architecture, the researchers finally obtained a stable self-starting mode-locked laser operation. The typical duration of a single soliton pulse is 729 fs, with a large signal-to-noise ratio of 75 dB in the radio-frequency domain.

"We validated saturable [absorption](#) as a general nonlinear optical property of metal nanostructures, a well-known phenomenon for semiconductors. More importantly, we demonstrated a promising application for nonlinear plasmonics, a method most related studies paid little attention to," Dr. Jiyong Wang added.

More information: Jiyong Wang et al, Saturable plasmonic metasurfaces for laser mode locking, *Light: Science & Applications* (2020). [DOI: 10.1038/s41377-020-0291-2](https://doi.org/10.1038/s41377-020-0291-2)

Provided by Chinese Academy of Sciences

Citation: Saturable plasmonic metasurfaces for laser mode locking (2020, May 26) retrieved 3 October 2025 from <https://phys.org/news/2020-05-saturable-plasmonic-metasurfaces-laser-mode.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--